

# INSUL-TUBE<sup>®</sup> HITEMP



Flexible closed-cell pipe insulation made with temperature resistant EPDM for continuous use in temperatures up to 150 °C (175 °C peak usage).

- Temperature resistant
- Use special glue for high temperatures, Insul 3300 from NMC (two component glue)

## Product features

- Thermal conductivity (EN ISO 8497):  
0,038 W/mK at 0 °C  
0,040 W/mK at 40 °C  
0,042 W/mK at 80 °C
- Fire performance: Euroclass E (EN 13501-1)
- Temperature range:  
from 0 °C up to +150 °C continuous operation  
peak usage up to 175 °C (EN 14707)
- Declaration of performance: W4FEF600  
(See website for DoP: [www.nmc.eu/dop](http://www.nmc.eu/dop))
- Tolerances according to prEN 14304 Table 1




[www.nmc.eu](http://www.nmc.eu)

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

**NMC sa**  
Gert-Noël-Straße - B-4731 Eynatten - Belgium  
Phone: +32 87 85 85 00  
Fax: +32 87 85 83 55  
E-Mail: [info@nmc.eu](mailto:info@nmc.eu)



# INSUL-TUBE® HITEMP

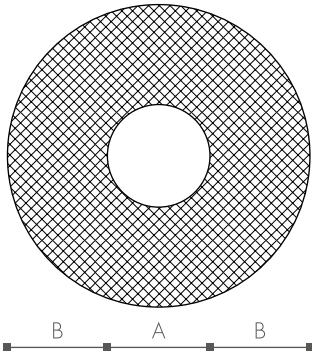

INSUL-TUBE® HITEMP is made of temperature resistant EPDM and maintains its flexibility even at temperatures of 150 °C (continuous operation) or 175 °C (peak usage) while maintaining the integrity of its technical properties.

Because of its low thermal conductivity, INSUL-TUBE® HITEMP keeps the loss of heat from distributors at a minimum. This maximizes not only the cost efficiency, but also the ecological efficiency of the entire unit.

INSUL-TUBE® HITEMP is a foam product with sound absorbing properties, reducing pop and flow noises in pipes.

For installation, please note the details in our processing instructions.

## Product range

Copper CU		Steel FE			Type	A	B	Length	Packaging unit
NW DN	outer Ø mm	NW DN	outer Ø mm	inch					
10	15	8	13,5	1/4	<b>15 x 13</b>	15	13	2m	136m
15	18	10	17,2	3/8	<b>18 x 13</b>	18	13	2m	118m
20	22	15	21,3	1/2	<b>22 x 13</b>	22	13	2m	98m
25	28	20	26,9	3/4	<b>28 x 13</b>	28	13	2m	78m
32	35	25	33,7	1	<b>35 x 13</b>	35	13	2m	58m
40	42	32	42,4	1 1/4	<b>42 x 13</b>	42	13	2m	48m
10	15	8	13,5	1/4	<b>15 x 19</b>	15	19	2m	78m
15	18	10	17,2	3/8	<b>18 x 19</b>	18	19	2m	72m
20	22	15	21,3	1/2	<b>22 x 19</b>	22	19	2m	64m
25	28	20	26,9	3/4	<b>28 x 19</b>	28	19	2m	48m
32	35	25	33,7	1	<b>35 x 19</b>	35	19	2m	36m